




# Assembly Instructions

ITEM NO: 31132

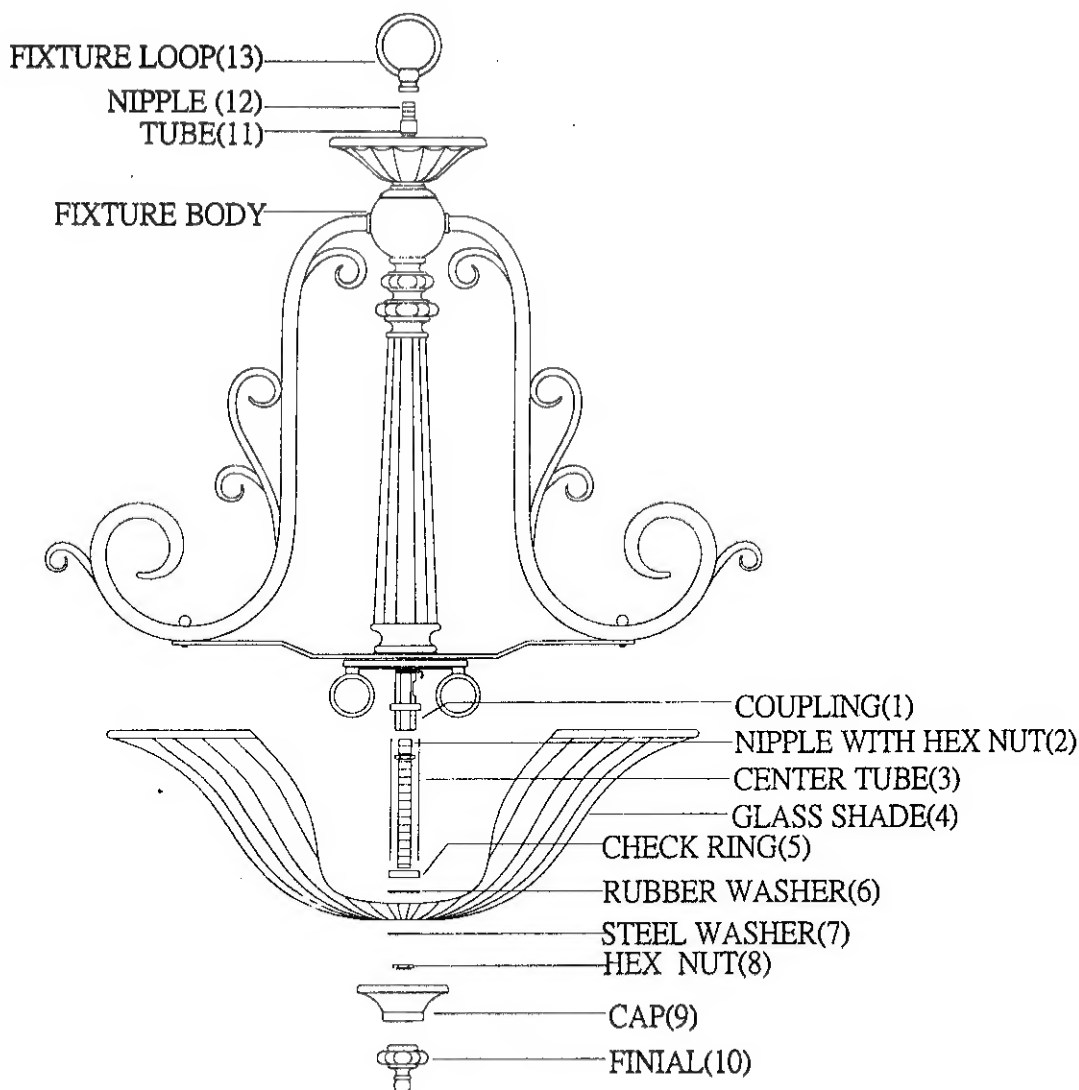

1. Carefully remove the fixture out of the carton, and check that all the parts are included referring to the above illustration. Make sure not to misplace any parts that are needed for the installation;
2. Install the tube(11), onto nipple (12), and secure them with fixture loop(13);
3. Screw the nipple with hex nut(2) into the coupling(1) then slide the center tube(3), check ring(5), rubber washer(6), glass shade(4), steel washer(7) onto nipple with hex nut(2), then secure them with hex nut(8);
4. Slide the cap(9) onto nipple with hex nut(2), then secure it with finial(10);
5. The fixture is ready for lamping and installation!